
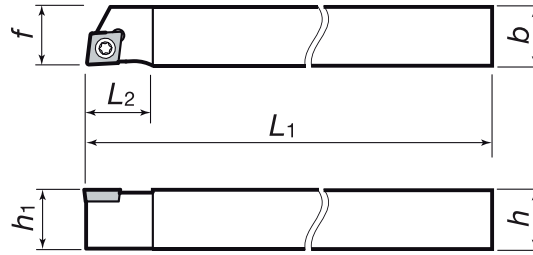


JSCL2CR/L

Without offset / Positive rake
Screw-on system

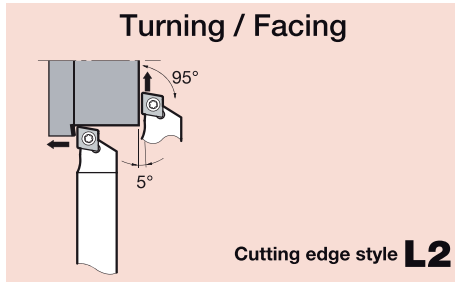

Right hand (R) shown

Cat. No.	Stock		Dimensions (mm)						Standard corner radius r_{ϵ}	Applicable inserts	Parts		Torque (N·m)
	R	L	h	b	L_1	L_2	h_1	f			Clamping screw	Wrench	
JSCL2CR/L1010K06	●	●	10	10	125	12	10	10	0.4	CC□□0602	CSTB-2.5	T-8F	1.2
JSCL2CR/L1212K06	●	●	12	12	125	12	12	12	0.4				

4

TAC External Toolholders

Basic Selection Chipbreakers CC□□0602 CC□□09T3

Operation	Precision finishing	Precision finishing	Finishing	Finishing to medium cutting	Finishing to medium cutting	Finishing to medium cutting	Finishing to medium cutting	Cast iron	Cast iron	Aluminium alloy	Aluminium alloy	Aluminium alloy	Hard materials
Chipbreaker	JS	01	PSF	J10	FR/L-J10	PS	PSS	CM	-	AL	Angular	With chipbreaker	T-CBN
Page	2-99	2-96	2-96	2-99	2-99	2-97	2-97	2-97	2-101	2-98	2-100	3-22	3-12
Appearance													
Toolholders					Sharp edges								
JTC*/JSC**06	CCGT0602**	CCGT0602**	CCMT0602**	CCGT0602**	CCGT0602**	CCMT0602**	CCMT0602**	CCMT0602**	CCMW0602**	CCGT0602**	CCGT0602**	CCMT0602**	2QP-CCGW0602**
JTC*/JSC**09	CCGT09T3**	CCGT09T3**	CCMT09T3**	CCGT09T3**	CCGT09T3**	CCMT09T3**	CCMT09T3**	CCMT09T3**	CCMW09T3**	CCGT09T3**	CCGT09T3**	CCMT09T3**	2QP-CCGW09T3**

● : Stocked items.